



duplicatTM

The Duplicat 'floorplate' transmitter enables a laptop PC to be connected to a projector or other display via cat.5/6 UTP cable. The transmitter circuit board is small enough to be integrated into a floortrap or desktop interface panel without the need for any coaxial cable or clumsy power supplies.

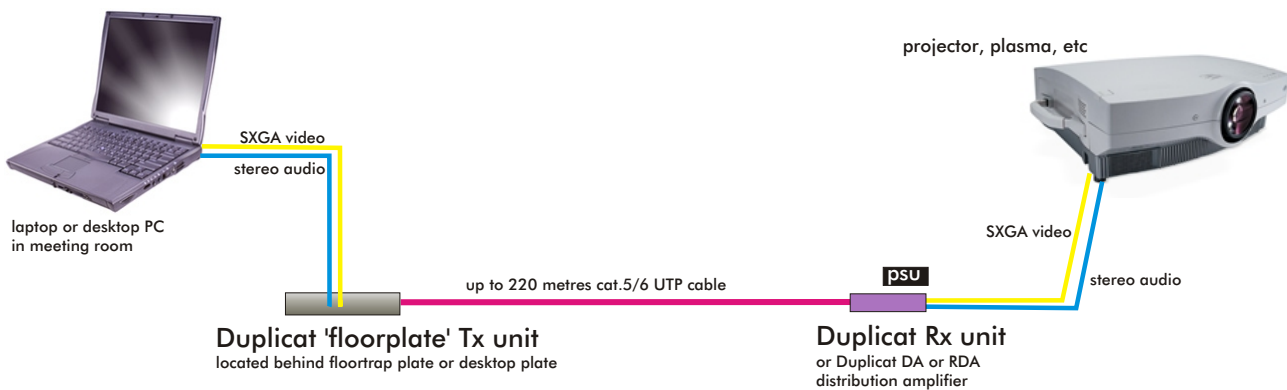


key features

- pin-sharp** - sharp edges and a notable absence of 'smearing' artefacts to 1600 x 1200 resolution
- long distance** - 220 metres of cable at 1280 x 1024 pixels - with high fidelity video and audio
- line-powered** - floorplate transmit unit can be line-powered from the receive end
- digital stereo audio** - 24-bit stereo digital audio transmission offered as an option (analogue in, analogue out)
- cat.6 compatibility** - unique *Infinity-6* skew correction ensures compatibility with all cat.5/cat.5e/cat.6 cables
- custom metalwork** - we can supply laser-cut metalwork to suit your floortrap or desktop

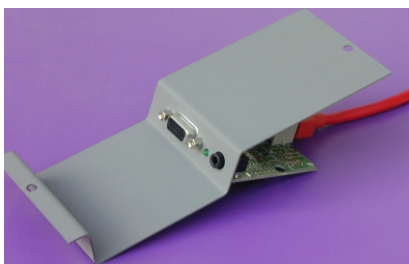

laptops can be plugged straight into the 15-pin VGA connector and 3.5mm audio jack. No local psu needed at Tx end. Audio transmission is digital to eliminate noise pick-up

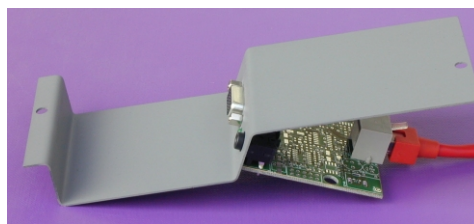

custom metalwork can be angled to improve the user's access to connectors, minimise floortrap depth and ensure that the floortrap cover can be fully closed

Duplicat floorplate product selector June 2003

	floorplate system	floorplate + audio
floorplate Tx unit	T-1-FP	T-1A-FP
0-80m Rx unit	R-80	R-80A
0-150m Rx unit	R-150	R-150A
0-220m Rx unit		
+cat.6 skew correction	R-220-16	R-220A-16

more information:

+44 (0)1962 859988

info@mauvesys.com